



SA2200

Dual Oven - Stand Alone

The SA2200 stand-alone ovens from Miyachi Unitek provide the perfect solution for adding bakeout capacity independent from an atmospheric enclosure.

Manufactured to the highest standards, the ovens provide the most efficient distribution of conducted and radiant heat.

- **Front loading**, 200°C bakeout ovens, vacuum pumps, and a cooling water recirculator are fully integrated into a single, compact frame utilizing minimal production space
- **Easy access front panel control**- initiates pre-programmed "vacuum-backfill" bakeout process with the single push of a button
- **Uniform heat distribution** - individually controlled heaters ensure uniform distribution of heat and component consistency

Standard Model SA2200 is a fully-integrated reliable system which consists of:

Front-loading 200°C heated wall ovens

- Individual wall heater temperature controller
- Programmable vacuum-backfill bakeout schedule with up to 40 process segments
- Safety mechanical over temperature protection
- 3rd party Windows XP® based software for creating vacuum bakeout schedules via RS-232 communication port (Computer not included)
- Rated to achieve 20 millitorr (0.026 mbar)
- Digital display vacuum gauge

Model 300 vacuum pumps

- Natural lubrication design oil vacuum pumps
- Pump speed of 6.8cfm (9.7m3/h)
- Quick change foreline trap alumina cartridge
- Integrated mist eliminator filter

Built-in 12 inch deep work area:

- Allows easy parts loading and unloading in front of the ovens

System Options:

- Cooling water recirculator delivers a closed-loop air-cooled circulating water to cool the oven flange preventing premature vacuum gasket wear
- 27-inch deep wall or heated shelf ovens
- 2 or 3 heated shelf ovens available in polished stainless steel or hard anodized aluminum
- Dry, molecular drag or turbo vacuum pumps
- Higher temperature heated shelf ovens available upon request




specifications

Input power:	Power: 3-Wire, 220-240 VAC, 1-Phase, 30 Amp, 50/60 Hz (NEMA L14-30 plug included)
Pneumatic requirements:	Pneumatic backfill and door control: nitrogen/argon, 80 psi min; 1/4" NPT anchor, 3/8" OD polyflow tubing
Ovens:	
Material:	Wall heated -polished stainless steel only Heated shelf - hard anodized aluminum or polished stainless steel
Inside dimensions:	18" Standard Model: 11.5"W x 18.5"D x 10.5"H (292.1mm x 469.9mm x 266.7mm) 27" Model: 11.5"W x 27.8"D x 10.5"H (292.1mm x 706.1mm x 266.7mm)
Temperature accuracy:	Stainless steel heated wall or heated shelf ovens +/- 5°C of setpoint Aluminum heated shelf ovens +/-2°C of setpoint <i>Note: Temperature taken at the thermocouple location</i>
Footprint (Standard Model):	29.5"W x 34.2"D x 66.3"H (749.3mm x 868.7mm x 1684.0mm)
Vacuum level (Standard Model):	20.0 mtorr (26.6 x 10 ⁻³ mbar)

Specifications subject to change without notice.

dimensions

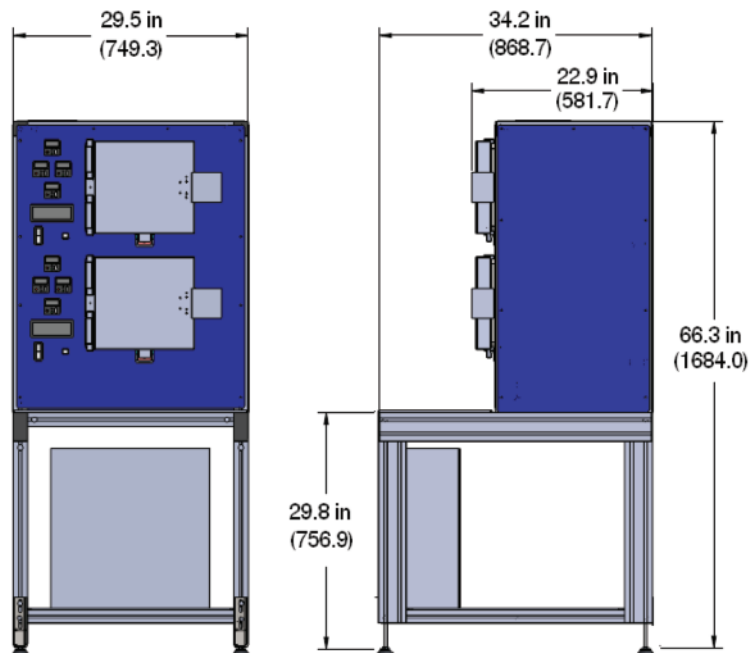

1820 S. Myrtle Ave. • P.O. Box 5033
Monrovia, CA 91017-7133 US • T: (626) 303-5676 • F: (626) 358-8048
info@muc.miyachi.com • www.miyachiunitek.com
ISO 9001 Certified Company • 24/7 Repair Service: 1-866-751-7378



Miyachi Unitek Midwest Sales Office:
50384 Dennis Ct., Wixom, MI 48393
T: 248 313 3078 • F: 248 313 3031
midwestsales@muc.miyachi.com

Miyachi Unitek Mexico Sales Office:
5959 Gateway West, Ste 327, El Paso, TX 79925
T: (915) 881-8765
mxsales@muc.miyachi.com

Miyachi Unitek North Asia Sales Office:
Unit D, 20/F, Infotech Centre, 21 Hung To Road
Kwun Tong, HK • T: +852 2833-6998
F: +852 2833-6672 • asiapacific@muc.miyachi.com

Miyachi Unitek South Asia Sales Office:
No 26, Sin Ming Lane, #04-125,
Midview City, 573971, SG
T: +65 96318407 • southasia@muc.miyachi.com

Miyachi Japan
2-6-6 Motoasakusa Taito, Tokyo, 111-0041, JP
T:+81-3-5246-6700 • F:+81-3-5246-6890

Miyachi China
Room 01,15th Floor, SML Center, No.610 Xujiahui
Road, Huangpu District, Shanghai 200025, CN
T:+86-21-6448-6000 • F:+86-21-6448-6550

Miyachi Europe
Lindberghstrasse 1 • DE-82178 Puchheim
T: +49 (0) 89 83 94 030 • F: +49 (0) 89 83 94 0310

Miyachi Brazil:
Av. Cecti, 608 – Bloco 16B – Empresarial Tamboré,
06460-120, Barueri, SP, BR
T: +55 (11) 4193-1187

follow us on:



Specifications subject to change without notice. Copyright© 2013 Miyachi Unitek Corporation. The material contained herein cannot be reproduced or used in any other way without the express written permission of Miyachi Unitek Corporation. All rights reserved.

Your Local Miyachi Unitek Representative: